


# GP-AMP terminals Instruction



GP-AMP is designed to detect a wide range of gases and vapours. The amplifier has three potential free relay outputs with common arm: relays for Alarm1 (low alarm) and Alarm2 (high alarm) and a fault relay. GP-AMP can be delivered with an analogue output of 0-5 V, 0-10 V or 4-20 mA.

Please refer to manual for GP-SA EM03040E

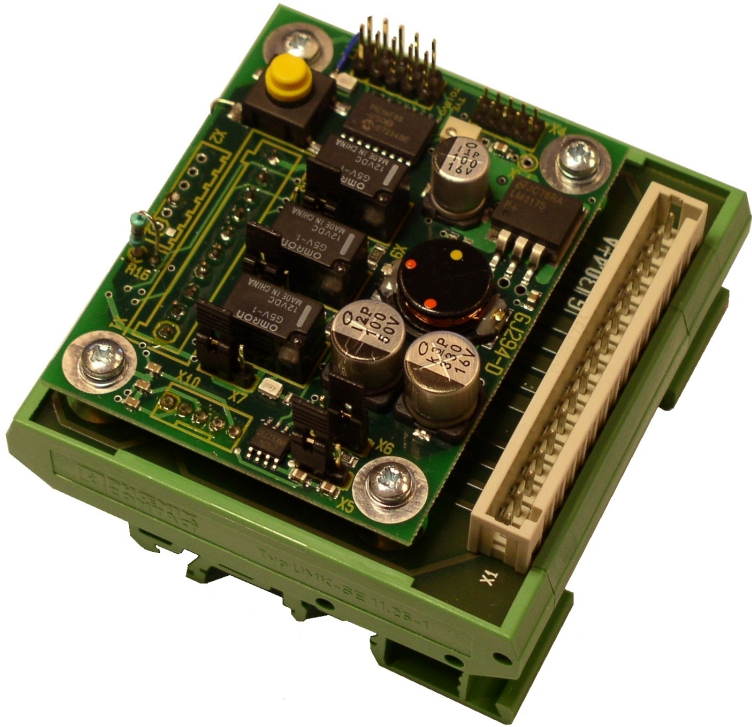